


PowerCCD-L

Operator's Guide



2015/11/11 V1.4

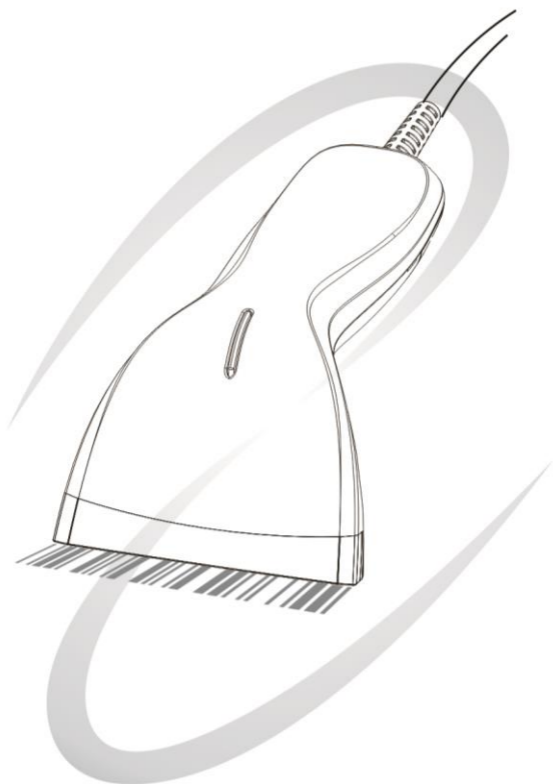

+M%9S

Start Configuration

- Reset scanner to factory default Setting:



+M%9D

Reset to default

- Interface Setting:



AAC

< USB HID >



AAD

USB Virtual COM



+M%9E

End Configuration



+M%9S

Start Configuration

● Language Setting:



BBA

< **American** >



BBB

Italian



BBC

Spanish



BBD

France



BBE

Germany



BBF

Japanese



+M%9E

End Configuration



+M%9S

Start Configuration

● Terminator setting:



BKA

None



BKB

< CR >



BKC

TAB



BKD

ESC



+M%9E

End Configuration



+M%9S

Start Configuration

● Scan Mode:



EAA

Trigger Mode



EAB

< Auto Off Mode >



EAC

Continuous/Trigger Off Mode



EAD

Test Mode



EAE

Continuous Mode



EAF

Continuous/Timeout Off Mode



EAG

Flash Mode



EAH

Continuous/No Trigger



+M%9E

End Configuration

● Prefix and Suffix:



+M%9S

Start Configuration



EFA

Set up prefix (00H)



EGA

Set up suffix (00H)



+M%9E

End Configuration

Note:

The maximum characters can be set as prefix and suffix are 10 ASCII characters, if the setting is 0 means there is no prefix or suffix.

Formats of prefix and suffix are as follows:

Prefix string	Barcode data	Suffix string
------------------	-----------------	------------------

The steps to setup prefix and suffix:

Scan “Enter to Setup” and “Prefix” barcode.

Find the ASCII code in appendix A.

Scan the desired barcode to set as prefix/suffix.

Scan “End” barcode.

Scan “End Configuration Setup”.

Appendix A

ASCII Code



0



1



2



3



4



5



6



7



8



9



A



B



C



D



E



F



Y



N

Appendix A



+M%9A

End of Setting



+M%9E

End Configuration

ASCII Table:

	0	1	2	3	4	5	6	7
0	NUL	DLE	SP	0	@	P	`	p
1	SOH	DC1	!	1	A	Q	a	q
2	STX	DC2	“	2	B	R	b	r
3	ETX	DC3	#	3	C	S	c	s
4	EOT	DC4	\$	4	D	T	d	t
5	ENQ	NAK	%	5	E	U	e	u
6	ACK	SYN	&	6	F	V	f	v
7	BEL	ETB	‘	7	G	W	G	w
8	BS	CAN	(8	H	X	h	x
9	HT	EM)	9	I	Y	i	y
A	LF	SUM	*	:	J	Z	j	z
B	VT	ESC	+	;	K	[k	{
C	FF	FS	,	<	L	\	l	
D	CR	GS	-	=	M	}	m	}
E	SO	RS	.	>	N	^	n	~
F	SI	US	/	?	O	_	o	DEL